



LNB

KU-BAND DUAL BAND EXT REF

1000XDF

SPECIFICATIONS

Noise Figure	0.8 dB typ., 1 dB max. at room temp. @ CF
L.O. Stability	Phase Locked to External Reference
Phase Noise (SSB) max.	Depends on External Reference
Input VSWR	2.5 : 1 max.
Output VSWR	2.5 : 1 max.
Gain	60 dB typ., 55 dB min., 65 dB max.
Gain Flatness (over full band)	≤ 5 dB p-p
Output P1dB	+ 5 dBm min.




DC Power	+ 12V to + 24V DC (See below for Band Select)
Current	350 mA max.
Input (waterproof)	WR-75 waveguide grooved
Output (waterproof)	F-Connector (75 Ohm) N-Connector (50 Ohm)
Dimensions (L x W x H)	128 mm x 60 mm x 40 mm (5.0 in x 2.36 in x 1.57 in)
Weight	400 g (14.11 oz)
Operating Temperature	- 40 to + 60°C
Storage Temperature	- 40 to + 80°C
External Ref Freq	10 MHz (sine-wave), - 10 to 0 dBm

FREQUENCY BANDS

	Band 1 (13V)	Band 2 (18V)
Frequency Band (GHz)	10.70 - 11.70	11.70 - 12.75
L.O. Frequency (GHz)	9.75	10.6
IF Frequency (MHz)	950 - 1950	1100-2150

HOW TO ORDER

1008XDFN

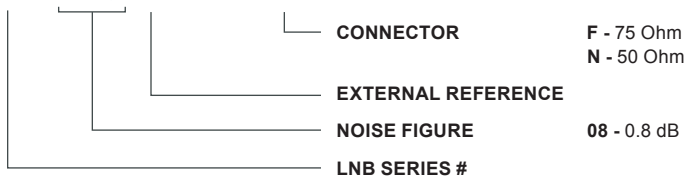

MECHANICAL DIAGRAM

