





## Bias Tee GST6ADC

- **Bandwidth : 950MHz to 2GHz**
- **Reference & IF Supplied from Modem**
- **Up to 6 Amps DC input**
- **15-60 VDC Power input**
- **"N" or "F" RF Interface Options**
- **DC port-Red, Ground port-Black**



### Mechanical Drawing

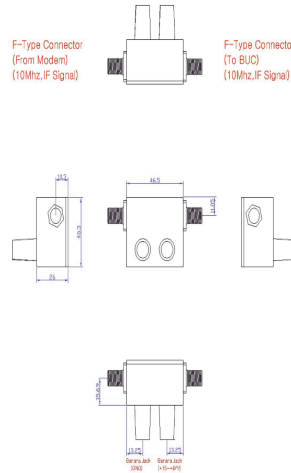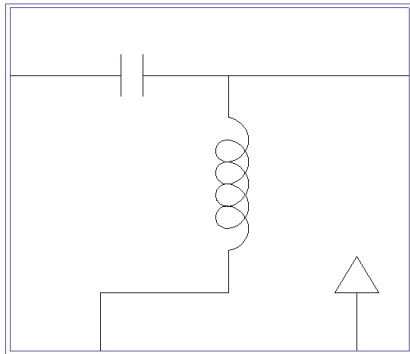

Parameters		Specifications
RF Frequency		950 MHz to 2 GHz
Voltage		15-60 VDC
Current	Max.	6 Amps
Insert Loss	10 MHz	1.0dB Max.
	950 MHz-1.7GHz	1.0dB Max.
DC Interface		Banana Jack
RF Interface	GST6ADCF	From Modem and to VSAT : F type
	GST6ADCN	From Modem and to VSAT : N type
Impedance	F-type	75 Ohms
	N-type	50 Ohms
Operating Temperature		-40 deg C to +55 deg C
Dimensions		53.1x43.55x21.3mm
Weight	Max.	150g